


Electrical data STC

Nominal power (Pmpp)	233 Wp
Nominal voltage (Umpp)	24.5 V
Nominal current (Impp)	9.53 A
Open circuit voltage (Uoc)	29.1 A
Short circuit current (Isc)	9.99 A
Cell efficiency	24.2 %
Power sorting	-0/+5 %

STC (Standard Test Conditions): irradiance 1000 W/m², cell temperature 25°C, AM 1.5
 Measuring tolerances ±3 % (Pmpp); ±10 % (Umpp, Impp, %, Uoc, Isc)

General data

Number of cells (matrix)	40 (4x 10)
Dimensions (LxWxH) ±3.0 mm	780x1695x8 mm
Modular dimensions (LxW)	696x1700 mm
Weight	23.1 kg

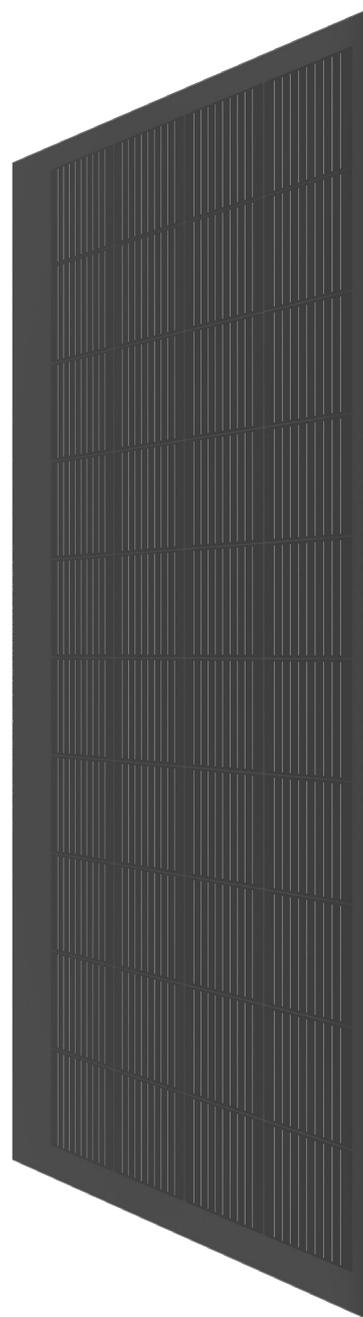

E-mail: info@megasol.ch
 Hotline: +41 62 919 90 90
www.megasol.ch



Border modules are electrically compatible with the corresponding basic module (60 solar cells).
 For technical reasons of production, despite utmost care, the surface properties and optical colour effect may vary from the basic module.



Note: The instructions in the installation manual must be strictly complied with. Further information about approved utilization of products can be found in the installation manual or can be requested from the technical service.

Megasol partner

Subject to errors and technical modifications.
 © Megasol Energy Ltd | Version: 10/2024